

Vinyl Matt Emulsion


It's a premium grade Emulsion suitable for interior and exterior use. It is applied directly to such surfaces as new plaster, soft boards and cement masonry walls. Hard and impenetrable surfaces should be prepared with a coat of Undercoat for ultimate results.

Aura Vinyl Matt is recoatable on an average of 3-4 hours. All application of our high quality paints can be done by a roller, brushes or spray machine.

Wallmaster

It is a polymer based wall coating. It is enhanced with a lighter micro-filler that produces lighter plaster and smoother finish.

It is manufactured in a variety of colours. The product can be produced in different sizes of grits (1mm, 2mm, 3mm) to provide the desired pattern depth.

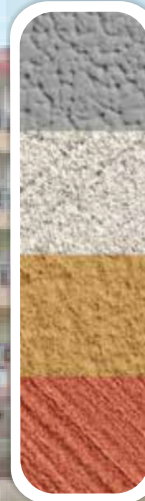

📍 Factory: Industrial Area, Road A,
Off Enterprise Rd, Alizeti Crescent
P.O Box 124404-00100 Nairobi, Kenya

☎ +254 41 224 202 2 | +254 725 117 180

📍 Naivasha Depot: Petda Guest House,
KWFT Bank Building near Telkom Offices
Tel: 0723 849 325 / 0728 332 820

✉ info@aurapaints.co.ke | elitefields@gmail.com

🌐 www.aurapaints.co.ke



AURA PREMIUM
Paints Colours for life

Quality Manufacturers of

1 **Wall Master**

2 **Decorative, Industrial
& Automotive Paints**

3 **Tile Adhesive** 4 **Grout**

5 **Gypsum Skimming Filler**

6 **Thinners & Turpentine**





Silk Vinyl Emulsion

A premium quality silk emulsion for interior use for walls and ceilings. It provides a washable silk sheen finish, fast drying, excellent colour retention and opacity.

Prior to application of Silk Vinyl, an excellent Undercoat of CoverMatt Plus Emulsion is required for ultimate results. For application use brushes, rollers or spray machine



Super Gloss

High quality Alkyd gloss paint for best colour retention and durability. Manufactured for interior and exterior surfaces.

All surfaces should have an undercoat application before applying Super Gloss Enamel. It is recoatable on an average of 12-16 hours.

Wood Varnish

Formulated to give a hard clear high gloss on timber floor, hardboard, chipboard and furniture. It as well preserves and enhance the beauty of furniture.

For ultimate result, apply 3 coats on timber with an average of recoat time of 6 hours.

Weather Guard Paint

It's a special Exterior paint with exclusive Color Lock technology that provides the ultimate performance for rich, full color and unprecedented durability.

Outstanding durability against the harshest weather conditions, Lifetime Limited Warranty, Superior adhesion, Self-priming in most situations



Tile Adhesive

It is a specially formulated cement-based polymer modified tile adhesive with improved workability, increased bond strength and extended coverage.

Perfect for use in extreme applications where tiling is subject to moisture, chemical attacks or frequent heavy traffic, swimming pools etc.

Gypsum Skimming Filler

It is a cellulose-based filler for filling cracks in plastered and wooden walls. It gives a smooth and even finishing before paint work is done.

